


# Galleon II 3P/3P 10-80KVA

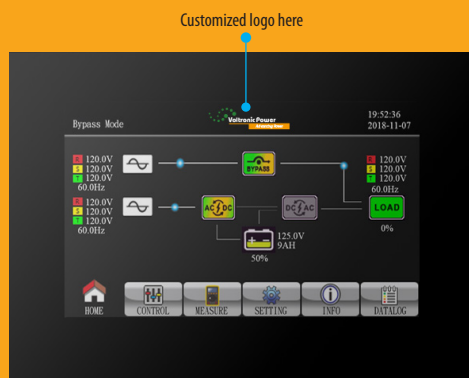

5" Touch LCD Panel

- DSP technology guarantees high reliability**  
 DSP and MCU dual chips to secure the product reliability.
- Output power factor 1**  
 For critical applications, this 3-phase online UPS with output power factor 1.0 ensures higher efficiency and advanced performance.
- Adapting the latest Silicon carbide diodes to enhance the system efficiency**  
 Through adapting the latest Silicon carbide diodes, no matter it's in AC mode and battery mode, the efficiency is higher than 96%.
- Dual Inputs**  
 Galleon II 33 series is also available for optional dual inputs to support various inputs to have flexibility for system configuration.
- Very powerful charger to shorten the recharge time**  
 Adapting the charger rating equals to 30% of UPS capacity on 10/20Kva. Charger rating is also 20% of UPS capacity for 30Kva and above models.
- Adjustable charging current**  
 Users can adjust charging current via LCD setting based on various battery configurations.
- Parallel up to 6 units with common battery pack**  
 Supports maximum 6 units in parallel with common battery pack for the parallel system.
- 5" color touch type LCD display**  
 Inbuilt 5" color touch type LCD display with 500 event/data logs.
- Optional programmable relay dry contact card**  
 Configurable 4 dry contact ports definition through software for various applications.
- Voice warning / error code notice**  
 Inbuilt the speaker to have human voice for the warning / error codes notice instead of traditional beeps.
- High overload capability**  
 Supporting 110% overload capacity for 60 min and up to 1 min overload condition at 150% load.
- Adjustable battery design**  
 The number of connected batteries can be adjusted flexibly based on different power demands.
- Dynamic password feature optimizes service performance**  
 This dynamic password is automatically generated from our exclusive utility tool. Each time when it is required to change service-related settings, this utility tool would generate an unique password on time basis. It secures UPS from unexpected operation due to unauthorized settings.
- Power walk-in function**  
 Galleon II 33 is designed to have flexible power walk-in by way of adjusting the power walk-in time. This setting will optimize generator sizing and reduce the impact to the AC source by having different walk-in time period for different paralleled UPS system when AC grid is recovered.

## Galleon II 3-phase in/3-phase out Online UPS Selection Guide

ONLINE UPS

MODEL	10K (L)*	15K(L)	20K (L)*	30K (L)*	40K (L)	60KL	80KL	
<b>PHASE</b>	3-phase in / 3-phase out							
<b>CAPACITY</b>	10KVA /10KW	15KVA /15KW	20KVA /20KW	30KVA /30KW	40KV /40KW	60KVA /60KW	80KVA /80KW	
<b>PARALLEL CAPABILITY</b>	up to 6 units in parallel							
<b>INPUT</b>								
Nominal Voltage	3 x 380/400/415 VAC (3Ph+N)							
Voltage Range	-30% ~ +20%							
Frequency Range	40~70 Hz							
Power Factor	≥ 0.99 @ 100% Load							
Harmonic Distortion (THDi)	< 3% at full linear load							
<b>OUTPUT</b>								
Output Voltage	3 x 360*/380/400/415 VAC (3Ph+N)							
AC Voltage Regulation (Batt. Mode)	± 1%							
Frequency Range (Synchronized Range)	46~54Hz or 56~64Hz							
Frequency Range (Batt. Mode)	50/60 Hz ± 1%							
Current Crest Ratio	3:1 (max.)							
Harmonic Distortion	≤ 1 % THD (Linear Load) ; ≤ 3 % THD (Non-linear Load)							
Transfer Time	AC Mode to Batt. Mode	Zero						
	Inverter to Bypass	Zero						
Waveform (Batt. Mode)	Pure Sine wave							
Overload Capability	100-110% for 60 min, 111-125% for 10 min, 126%~150% for 1 min; >150% or 400ms							
<b>BYPASS</b>								
Nominal Voltage	3 x 380/400/415 VAC (3Ph+N)							
Voltage Range	-30% ~ +20% (Adjustable)							
Frequency Range (Synchronized Range)	46~54Hz or 56~64Hz							
Overload Capability	> 130% 1 minute (default) Continuously working until breaker protection (optional)							
<b>EFFICIENCY</b>								
AC Mode	96.0%							
ECO Mode	99.0%							
Battery Mode	96.0%							
<b>BATTERY</b>								
Standard Model	Battery Type	12 V/9 Ah	12 V/9 Ah	12 V/9 Ah	12 V/7 Ah	12 V/9 Ah	N/A	
	Numbers	(10+10) pcs	(16+16) pcs	(16+16) pcs	(16+16) pcs x 2 strings			
	Typical Recharge Time	9 hours recover to 90% capacity						
	Charging Current (max.)	1A ~ 12A (Adjustable)				1A ~ 16 A (Adjustable)		
	Charging Voltage	+/-136.5 VDC ± 10%	+/-218 VDC ± 10%					
Long-run Model	Battery Type	Depending on the applications						
	Numbers	+/- 10 pcs	+/-16 pcs ~ +/- 20 pcs (Adjustable)					
	Charging Current (max.)	1A ~ 12A (Adjustable)			1A ~ 16 A (Adjustable)	2A ~ 24 A (Adjustable)	2A ~ 32A (Adjustable)	
	Charging Voltage	+/-136.5 VDC ± 10%	+/-13.65V x N (N=16~20)					
<b>INDICATORS</b>								
LCD Panel	UPS status, Load level, Battery level, Input/Output voltage, Discharge timer, and Fault conditions							
<b>PHYSICAL</b>								
Standard Model	Dimension,DxWxH (mm)	630 x 250 x 826			815 x 300 x 1000		N/A	
	Net Weight (kgs)	124	139	225	250			
Long-run Model	Dimension,DxWxH (mm)	630 x 250 x 826			815 x 300 x 1000		790 x 360 x 1010	
	Net Weight (kgs)	28	43	60	67	108	113	
<b>ENVIRONMENT</b>								
Operation Temperature	0-40°C							
Operation Humidity	< 95% and non-condensing							
Altitude**	0 ~ 1500m at full load							
Noise Level	Less than 60 dB @1 Meter			Less than 63 dB @1 Meter		Less than 65 dB @1 Meter		
<b>MANAGEMENT</b>								
Smart RS-232 / USB	Supports Windows® 2000/2003/XP/Vista/2008, Windows® 7/8/10, Linux and MAC							
Optional SNMP	Power management from SNMP manager and web browser							

\*If output voltage is set as 3 x 360VAC, the output power of the unit will be de-rated to 90%.  
 \*\*If the UPS is installed or used in a place where the altitude is higher than maximum height, the output power will be derated 1% per 100m.  
 Product specifications are subject to change without further notice.